

DC Signal Surge Arrester



Ordering Model Code

SCN-AR-DCN


Features

SCN-AR-DCN DC Signal Surge Arrester is used to protect 4~20mA DC Line including 4-wire and 2-wire Transmitters from the damaging effects of over-voltage transients caused by lightning or switching events of electrical equipment.


Circuits are composed of sensitive elements of TVS (Transient Voltage Suppressor) and GDT (Gas Discharge Tube) which are connected to the communication line in serial and parallel. These are functioning like High Impedance which does not effect on the measured signals at the normal operating condition of the device.

- For DC Signals
- Double Protection Circuits
- Protection Mode: 3 Modes (L1-L2, L1-G, L2-G)

Block Diagram

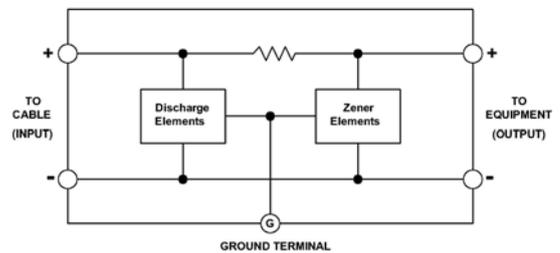

Terminal Connection

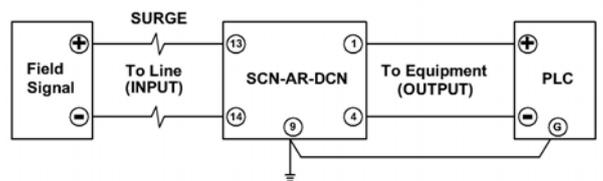

Specifications

Item	Specifications
Nominal Impulse Discharge Current	20kA / mode (8 x 20 uS) 60kA / Total (8 x 20 uS)
Response Time	1 nsec or less
Internal Serial Resistance	Approx 5 Ohms 2 wire including return
Discharge Voltage	28V ~ 30V or more
Maximum Line Voltage	30V DC
Maximum Load Current	100mA
Rated Voltage	24V DC
Current Leakage	25µA or less
Ambient Temperature and Humidity	-40°C ~ 80°C 90% RH
Elements Used	UL Certified
Featured Function	Automatic Return after Surge Inflow
Case Material & Color	Flame-resistant Resin / Black
Mounting	Plug-in Type Base & Body Separable
Weight	100g
Dimensions	22(W) x 75(H) x 85(D) mm

Dimensions

